



LC25F201R SPECIFICATION

NO	ITEM	CONTENT	
1	SENSOR	1/7.5"(CSP)	
2	SENSOR SIZE	1.482mm(H)x1.482mm(V)x2.1mm(D)	
3	STRUCTURE	5P	
4	TOTAL LENGTH	8.0±0.1mm(0.4mm Cover Glass)	
5	E.F.L	0.457±5%	
6	B.F.L	1.04mm	0.4mm Cover Glass
7	F.B.L	0.67mm	0.4mm Cover Glass
8	F/No.	3.0±5%	
9	FOV	VERTICAL	116° (2Y'=1.38mm)
		HORIZONTAL	116° (2Y'=1.38mm)
		DIAGONAL	152° (2Y'=2.1mm)
10	OPTICAL DISTORTION	<18.76%	
11	TV DISTORTION		
12	RELATIVE ILLUMINATION	>60.17%(2Y'=2.1mm)	
13	MAX IMAGE CIRCLE	∅2.1mm	
14	THERAD	M3.8xP0.15mm	
15	IR-CUT COATING		
16	BARREL MATERIAL	PC+10%GF (BLACK)	
17	HOLDER MATERIAL	PC121R(BLACK)	
18	CHIEF RAY ANGLE	<26.2°	

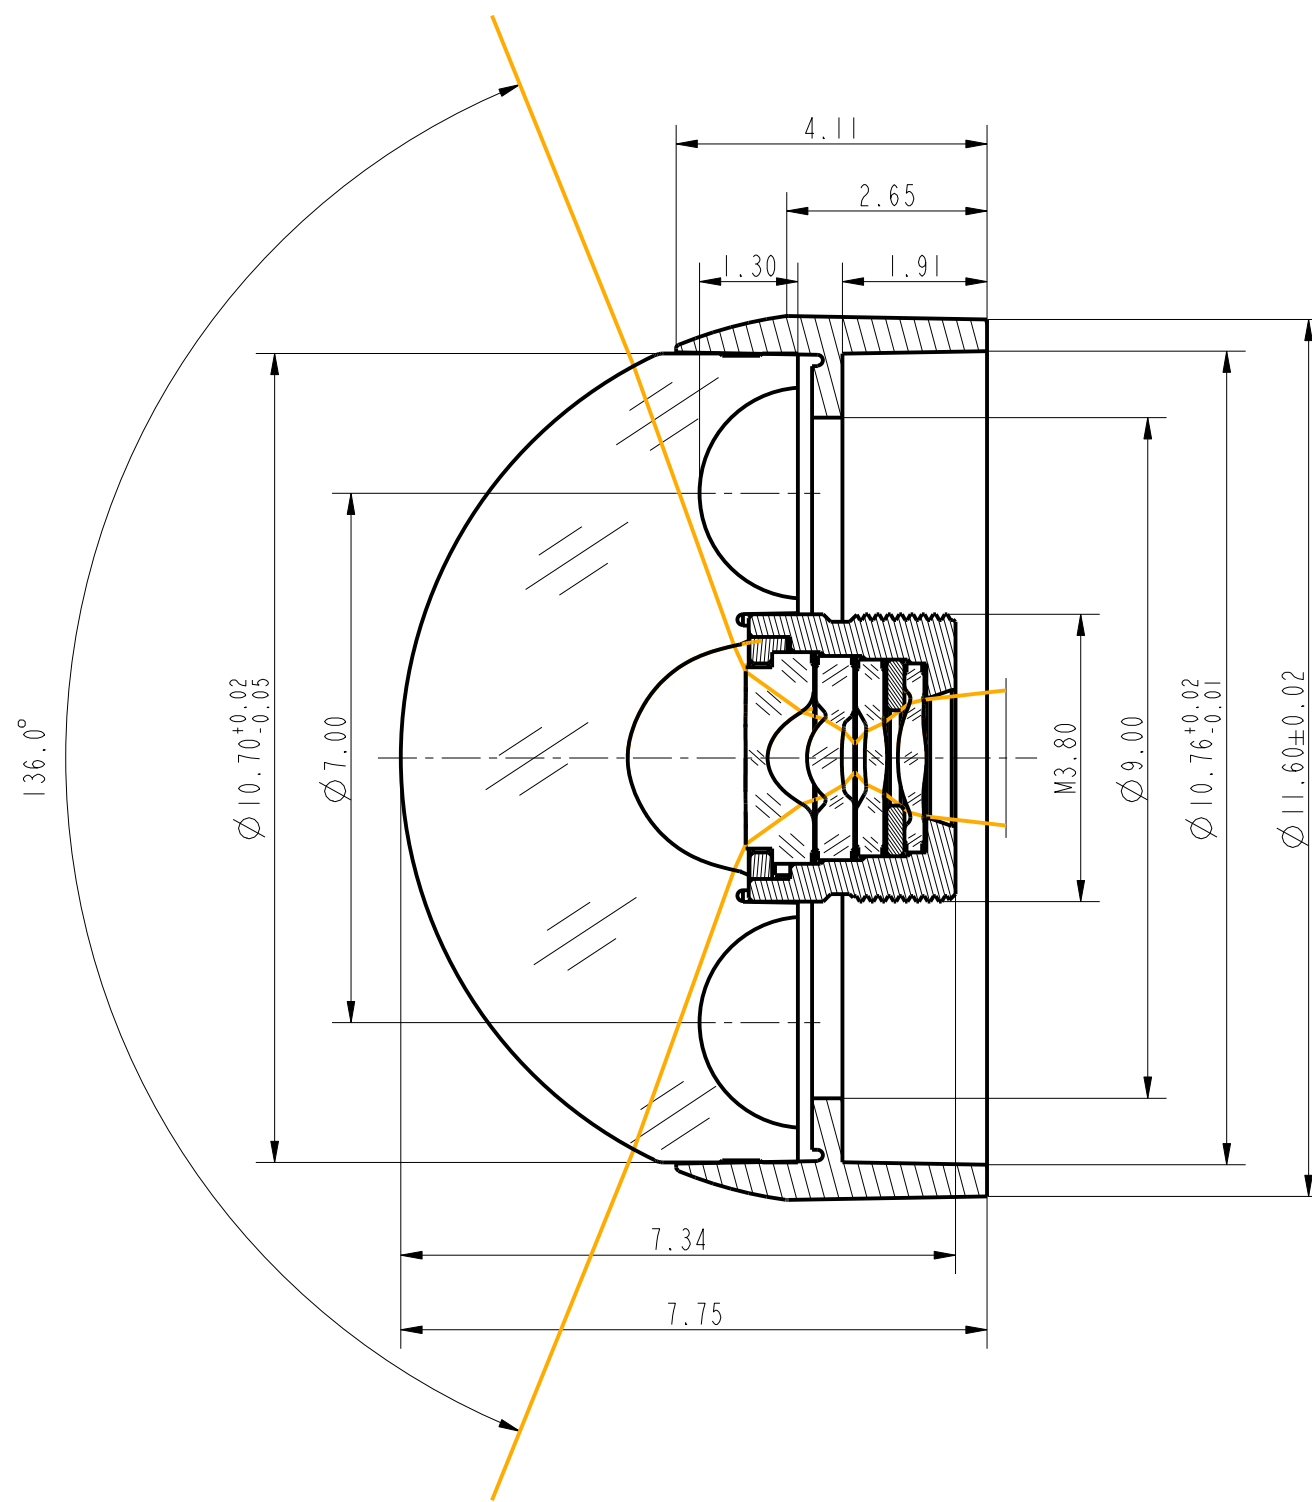

注：法令、法规禁止物质使用不可；含有与ROHS及REACH指令抵触物质使用不可。

 江西高瑞光电股份有限公司

标记	处数	区域	更改内容	担当	时间	比例	10:1		页码	1/1
承认	审核	设计	制图	时间						

HR0501A规格书

A0